




Changzhou Suma Precision Machinery Co...

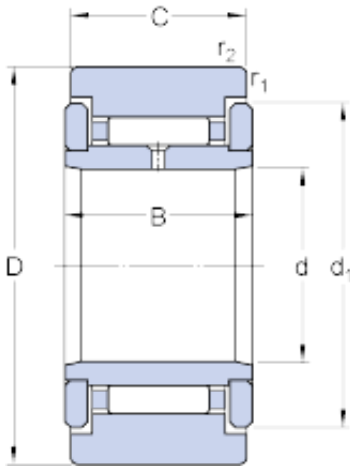

6 mm x 19 mm x 12 mm SKF NATR 6 X cylindrical roller bearings

Bearing No. NATR 6 X

NATR 6 X Bearing 2D drawings and 3D CAD models

Size	6x19x11 mm
Bore Diameter	6 mm
Outer Diameter	19 mm
Width	11 mm
D	19 mm
d	6 mm
C	11 mm
B	12 mm
d ₁	15 mm
r _{1,2} - min.	0.15 mm
Basic dynamic load rating - C	3.5 kN
Basic static load rating - C ₀	3.8 kN
Fatigue load limit - P _u	0.415 kN
Maximum static radial loads - F _r	3.8 kN
Maximum static radial loads - F _{0r}	5.5 kN
Limiting speed	5600 r/min
Category	Cam Follower and Track Roller - Yoke Type
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.023
EAN	7316577724823



Changzhou Suma Precision Machinery Co...

Product Group	B04144
Roller Surface Profile	Flat
Profile	Yoke Type
Enclosure	Sealed
Rolling Element	Needle Bearing
Relubricatable	Yes
Inch - Metric	Metric
Other Features	Caged With Flanged Inner Ring Gap Seal
Long Description	6MM Bore; 19MM Roller Diameter; 11MM Roller Width; Flat Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
Category	Cam Followers Yoke Type
UNSPSC	31171530
Harmonized Tariff Code	8482.40.00.00
Noun	Bearing
Keyword String	Cam Follower
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	NATR 6 X
Weight / LBS	0.044
Roller Width	0.433 Inch 11 Millimeter
Bore	0.236 Inch 6 Millimeter
Roller Diameter	0.748 Inch 19 Millimeter
d_1	15 mm
$r_{1,2}$ min.	0.15 mm
Basic dynamic load rating C	3.47 kN
Basic static load rating C_0	3.8 kN
Fatigue load limit P_u	0.415 kN
Maximum dynamic radial loads F_r max.	3.8 kN
Maximum static radial loads F_{0r} max.	5.5 kN



Changzhou Suma Precision Machinery Co...

Mass support roller	
---------------------	--

	0.02 kg
--	---------